


# imageRUNNER C3326i

# RELIABILITY, SECURITY AND HIGH PRODUCTIVITY FROM A COLOUR A3 MULTIFUNCTION PRINTER

## MAIN CONFIGURATION OPTIONS

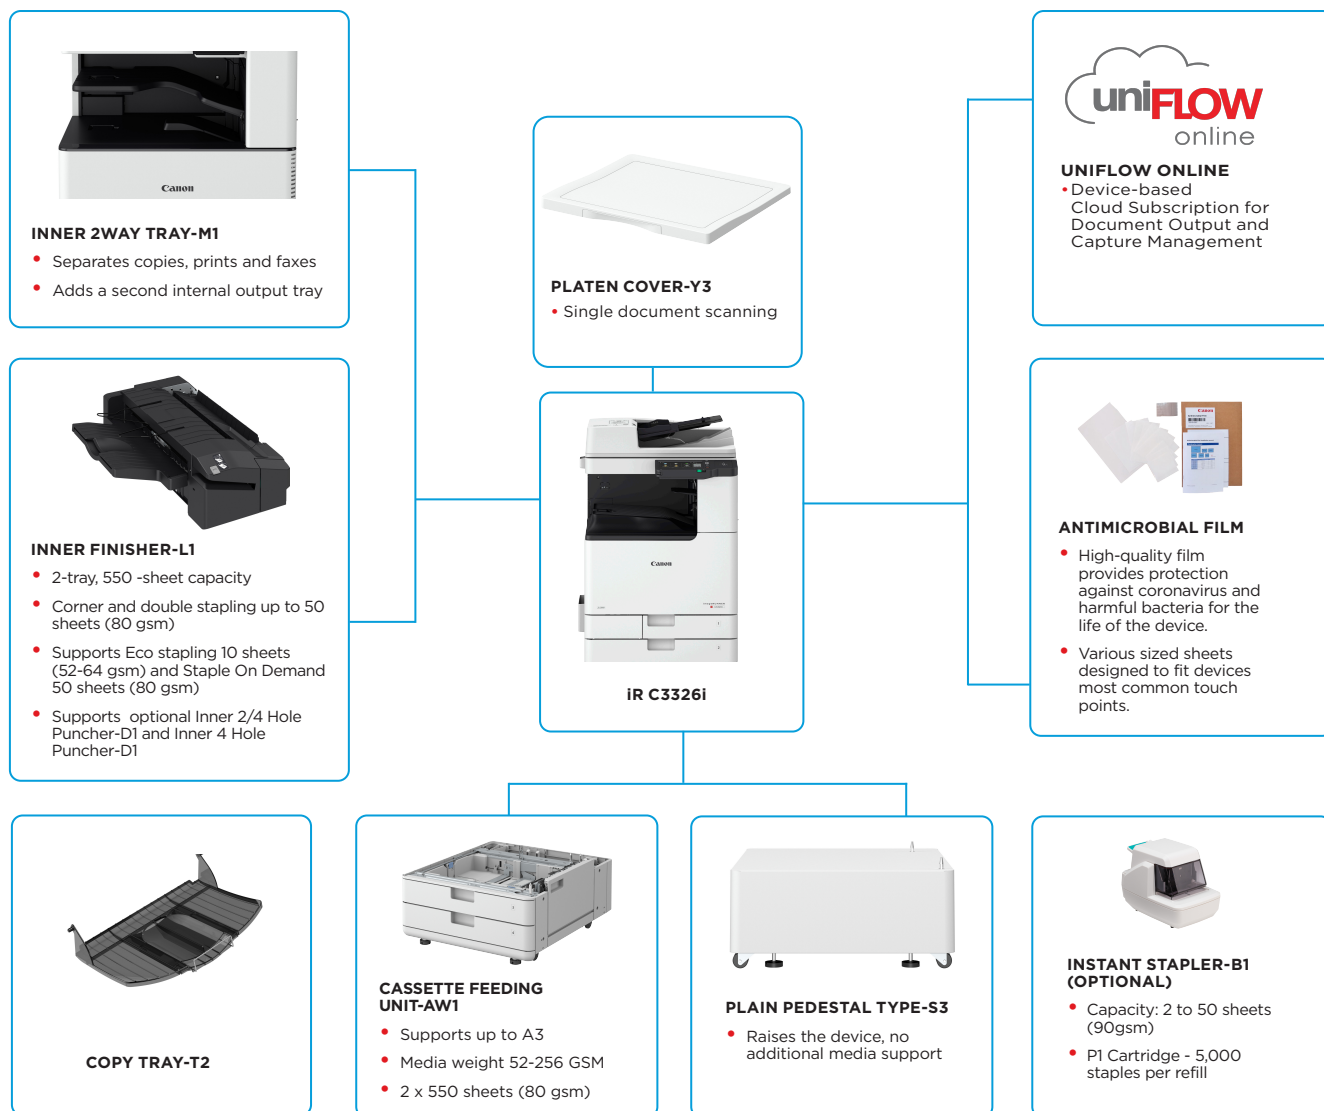

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the [online product configurator](#)

# TECHNICAL SPECIFICATIONS

# imageRUNNER C3326i

|                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                |                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>MAIN UNIT</b>                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>Page description languages</b>              | Standard: UFR II, PCL6<br>Optional: Adobe® PostScript® 3™<br>Supported file types:                                                                                                                                                                                                                                                                                                              |
| <b>Machine type</b>                       | A3 Colour Laser Multifunctional                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>Direct Print</b>                            | RUI: PDF, EPS, TIFF/JPEG, XPS<br>USB Memory: PDF, TIFF/JPEG, XPS<br>Network Place: PDF, TIFF/JPEG, XPS                                                                                                                                                                                                                                                                                          |
| <b>Core functions</b>                     | Print, Copy, Scan, Send and Optional Fax                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <b>Printing from mobile and cloud</b>          | AirPrint, Mopria, Canon PRINT Business, uniFLOW Online and Universal Print by Microsoft<br>A range of software solutions is available to provide printing from mobile devices and cloud-based services depending on your requirements. Please contact your sales representative for further information                                                                                         |
| <b>Processor</b>                          | 1.6 GHz Dual Core Processor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <b>OS Standard Printing</b>                    | Android/Windows® 10/Windows® 11/Chrome OS/macOS (11.2.2 or later), iOS (15.2 or later), iPadOS                                                                                                                                                                                                                                                                                                  |
| <b>Control Panel</b>                      | 17.8 cm/7 inch TFT LCD WVGA Colour Touch panel                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <b>Fonts</b>                                   | PS fonts: 136 Roman<br>PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT<br>J/K/S/T*1 (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts**<br>*1 Requires optional PCL INTERNATIONAL FONT SET-A1<br>** Requires optional BARCODE PRT KIT-D1                                                                                                                  |
| <b>Memory</b>                             | Standard: 2.0GB RAM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <b>Print Features</b>                          | Secure Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/ Orientations, Toner Reduction, Poster Printing, Forced hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer                                                                                                                                                       |
| <b>Storage</b>                            | Standard: (eMMC) 64GB<br>Optional: (SSD) 256GB                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <b>Operating System</b>                        | UFR II: Windows®10/11/Server 2012/Server 2012 R2/Server 2016/Server 2019/Server 2022, MAC OS X (10.13 or later)<br>PCL: Windows®10/11/Server 2012/Server 2012 R2/Server 2016/Server 2019/Server 2022, MAC OS X (10.13 or later)<br>PS: Windows®10/11/Server 2012/Server 2012 R2/Server 2016/Server 2019/Server 2022, MAC OS X (10.13 or later)<br>PPD: Windows®10/11, MAC OS X (10.13 or later) |
| <b>Interface Connection</b>               | NETWORK<br>Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE802.11b/g/n)<br>OTHERS<br>Standard: USB 2.0 (Host) x 2, USB 2.0 (Device) x 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <b>COPY SPECIFICATIONS</b>                     |                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Paper Supply capacity (A4, 80gsm)</b>  | Standard: 1,200 Sheets<br>Maximum: 2,300 Sheets (with optional Cassette Feeding Unit-AW1)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <b>Copy Speed</b>                              | 1-sided (BW/CL):<br>Up to 26/26 ppm (A4, A5, A5R, A6R), Up to 20/20 ppm (A4R), Up to 15/15 ppm (A3)<br>2-sided (BW/CL):<br>Up to 13/13 ppm (A4, A5R), Up to 10/10 ppm (A4R),<br>Up to 7/7 ppm (A3)<br>(A4, BW/CL): Approx. 7.0 / 8.7 seconds or less<br>600 × 600<br>Up to 999 copies                                                                                                           |
| <b>Paper output capacity (A4, 80gsm)</b>  | Standard: 250 Sheets<br>Maximum: 650 Sheets (with optional Inner Finisher-L1 and Copy Tray-T2)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <b>First-Copy-Out Time</b>                     | Automatic or Manual (9 Levels)                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Finishing capabilities</b>             | Collate, Group, Offset, Staple, Hole Punch, Eco Staple, Staple On Demand<br>* Finishing capabilities vary, depending on the options selected                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <b>Copy resolution (dpi)</b>                   | 25% - 400% (1% Increments)<br>Preset reduction/enlargement: 25%, 50%, 70%, 100%, 141%, 200%, 400%                                                                                                                                                                                                                                                                                               |
| <b>Supported Media Types</b>              | Multi-purpose Tray:<br>Thin, Plain, Heavy*, Recycled, Coated, Colour, Tracing, Bond, Transparency, Label, Pre-punched, Letterhead, Envelope<br>* SRA3 is unsupported for Coated (257-300gsm) and Heavy (257-300gsm) paper<br>Upper Cassette:<br>Thin, Plain, Recycled, Colour, Heavy, Bond, Transparency, Pre-punched, Letterhead, Envelope*<br>* Envelope Feeder Attachment Kit B (standard) is required.<br>Lower Cassette:<br>Thin, Plain, Heavy, Recycled, Colour, Bond, Transparency, Pre-punched, Letterhead, Envelope*<br>* Envelope Attachment Kit A (standard) is required.                                                                                     | <b>Multiple Copies</b>                         | Up to 999 copies                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Supported media sizes</b>              | Multi-purpose tray:<br>Standard size: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 98.4 x 139.7 mm to 320.0 x 457.2 mm<br>Envelopes: COM10 No.10, Monarch, ISO-C5, DL Envelope custom size: 98.0 x 98.0 mm to 320.0 x 457.2 mm<br>Upper Cassette:<br>Standard size: A4, A5, A5R, A6R, B5 Custom size: 105.0 x 148.0 mm to 297.0 x 215.9 mm<br>Envelope: ISO-C5<br>* Envelope Feeder Attachment Kit B (standard) is required.<br>Lower Cassette:<br>Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R<br>Custom size: 105.0 x 148.0 mm to 304.8 x 457.2 mm<br>Envelope*: COM10 No.10, Monarch, DL<br>* Envelope Attachment Kit A (standard) is required. | <b>Copy Density</b>                            | Automatic or Manual (9 Levels)                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Supported media weights</b>            | Multi-purpose tray: 52 to 300 gsm<br>Upper/Lower Cassette: 52 to 256 gsm<br>Duplex: 52 to 220 gsm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <b>Magnification</b>                           | 25% - 400% (1% Increments)<br>Preset reduction/enlargement: 25%, 50%, 70%, 100%, 141%, 200%, 400%                                                                                                                                                                                                                                                                                               |
| <b>Warm-Up Time (Quick start mode:ON)</b> | 4 Seconds or Less*<br>*Time from device power on to when copy icon appears and is enabled to operate on the touch panel display<br>From Sleep Mode: 10 Seconds or Less                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <b>Copy Features</b>                           | Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Book to Two Pages, Two-sided Original, Sort, Job Build, N on 1, Different Size Originals, Sharpness, Erase Frame, Copy ID Card, Skip Blank Pages, Free Size Original, Colour Mode, Reserved copy, Copy Sample                                                                                |
| <b>Dimensions (W x D x H)</b>             | 565 x 687 x 891 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>SCAN SPECIFICATIONS</b>                     |                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Installation Space (W x D)</b>         | 1168 x 1116 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <b>Type</b>                                    | Standard: Duplexing Automatic Document Feeder [2-sided to 2-sided]<br>Optional: Platen Cover-Y3<br>Up to 100 sheets                                                                                                                                                                                                                                                                             |
| <b>Weight</b>                             | Approx. 74.7 kg including toner                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>Document Feeder Paper Capacity (80 gsm)</b> | Platen: Sheet, Book and 3-Dimensional objects<br>Document Feeder media weight :<br>1-sided scanning: 30 to 128 gsm (BW), 64 to 128 gsm (CL)<br>2-sided scanning: 50 to 128 gsm (BW), 64 to 128 gsm (CL)                                                                                                                                                                                         |
| <b>PRINT SPECIFICATIONS</b>               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>Acceptable Originals and weights</b>        | Platen: max. scanning size: 297.0 x 431.8 mm<br>Document Feeder media size:<br>A3, A4, A4R, A5, A5R, B4, B5, B5R, B6<br>Custom size: 128.0 x 139.7 mm to 297.0 x 431.8 mm                                                                                                                                                                                                                       |
| <b>Print Speed</b>                        | 1-sided (BW/CL):<br>Up to 26/26 ppm (A4, A5, A5R, A6R), Up to 20/20 ppm (A4R), Up to 15/15 ppm (A3)<br>2-sided (BW/CL):<br>Up to 26/26 ipm (A4, A5R), Up to 20/20 ipm (A4R),<br>Up to 15/15 ipm (A3)                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <b>Supported media sizes</b>                   |                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Print Resolution (dpi)</b>             | Up to 1200 x 1200                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                |                                                                                                                                                                                                                                                                                                                                                                                                 |

# TECHNICAL SPECIFICATIONS

# imageRUNNER C3326i

|                                           |                                                                                                                                                                                                                                                                                         |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Scan Speed</b>                         | DADF (ipm: BW/CL, A4):<br>1-sided Scanning: 70/70 (300 dpi, send), 51/42 (600 dpi, copy)<br>2-sided Scanning: 35/35 (300 dpi, send), 25.5/25.5 (600 dpi, copy)                                                                                                                          | <b>SECURITY SPECIFICATIONS</b>                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Scan Resolution (dpi)</b>              | Scan for Copy: up to 600 x 600<br>Scan for Send: (Push,BW) up to 600 x 600, (Pull,BW) up to 600 x 600 (Push,CL) up to 300 x 300, (Pull,CL) up to 300 x 300<br>Scan for Fax: up to 600 x 600                                                                                             | <b>Authentication and Access Control</b>       | User Authentication (Picture Login, Picture and PIN Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online Express (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Access Management System (Access Control)                                                                                                                                    |
| <b>Pull Scan Specifications</b>           | Colour Network ScanGear2. For both TWAIN and WIA Supported OS: Windows®10/11/Server 2012/Server 2012 R2/Server 2016/Server 2019/Server 2022                                                                                                                                             | <b>Document Security</b>                       | Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print*), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS*), Send Data Security (Restricted E-mail/ File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support)<br>*Requires optional uniFLOW Online / uniFLOW<br>**Requires optional Universal Send Digital User Signature Kit-C1 |
| <b>Scan Method</b>                        | PushScan, PullScan, Scan to Network, Scan to USB Memory Key, Scan to Mobile device, Scan to cloud-based services (uniFLOW Online/Online Express)                                                                                                                                        | <b>Network Security</b>                        | TLS 1.3, IPsec, IEEE802.1X authentication, SNMP V3.0, WPA3 support, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), Disabling/Enabling (Network Protocols/Applications, Remote UI, USB Interface), G3 FAX separation from LAN, USB Port separation from LAN, Scan and Send -Virus Concerns for E-mail Reception                                                                                                                                                                                                |
| <b>SEND SPECIFICATIONS</b>                |                                                                                                                                                                                                                                                                                         | <b>Device Security</b>                         | Standard Storage Initialize, Job Log Conceal Function, Protecting MFP Software Integrity, Checking MFD Software Integrity & Platform Firmware Resiliency (NIST SP800-193) with Automatic System Recovery (Verify System at Startup, Runtime Intrusion Detection enabled with McAfee Embedded Control),                                                                                                                                                                                                                                                                                |
| <b>Destination</b>                        | Standard: E-mail/Internet FAX (SMTP), SMB3.1.1, FTP, WebDAV, Optional: Super G3 FAX                                                                                                                                                                                                     | <b>Device Management and Auditing</b>          | Administrator Password, Digital Certificate and Key Management, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Security Policy Setting, Remote Management Two-factor Authentication                                                                                                                                                                                                                                                                                                                                          |
| <b>Address Book</b>                       | LDAP (2,000)/ Local (1,600) /Speed dial (200)                                                                                                                                                                                                                                           | <b>ENVIRONMENTAL SPECIFICATIONS</b>            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Send resolution (dpi)</b>              | Push: 100 x 100, 150 x 150, 200 x 100 (Normal), 200 x 200 (Fine), 200 x 400*(SuperFine), 300 x 300, 400 x400*(UltraFine), 600 x 600*<br>Pull: 75 x 75, 100 x 100, 150 x 150, 200 x 200, 300 x 300, 400 x 400*, 600 x 600*<br>*Colour mode is black and white only                       | <b>Operating Environment</b>                   | Temperature: 10 to 30 °C<br>Humidity: 20 to 80% RH (Relative Humidity)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Communication protocol</b>             | File: FTP (TCP/IP), SMB3.1.1 (TCP/IP), WebDAV<br>Email/iFax: SMTP (send), POP3 (receive)                                                                                                                                                                                                | <b>Power source</b>                            | 220-240V 50/60Hz 4A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>File Format</b>                        | Standard: TIFF (MMR), JPEG *, PDF (Compact, Searchable, PDF/A-1b, Encrypted), XPS (Compact, Searchable), PDF/XPS (Device Signature, Office Open XML (PowerPoint, Word)<br>Optional: PDF (Trace & Smooth), PDF/XPS (User Signature)<br>*Single page only                                 | <b>Power consumption</b>                       | Maximum: Approx. 1,500 W<br>Standby: Approx. 44 W*<br>Sleep mode: Approx. 2.0W**2, Approx. 1.0W*3<br>*1 Reference value: measured one unit<br>**2 Wireless LAN power save mode OFF<br>*3 Wireless LAN power save mode ON<br>**2*3 Sleep mode is not available in all circumstances due to certain settings.                                                                                                                                                                                                                                                                           |
| <b>Universal Send Features</b>            | Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Erase Frame, Job Build, Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation | <b>Typical Electricity Consumption (TEC)*:</b> | 0.32 kWh<br>Note:<br>As per US Energy Star 3.0<br>For detailed information relating to Erp:Lot6/26 regulation, please go to: <a href="https://www.canon-europe.com/for_work/lot26/">https://www.canon-europe.com/for_work/lot26/</a>                                                                                                                                                                                                                                                                                                                                                  |
| <b>FAX SPECIFICATIONS</b>                 |                                                                                                                                                                                                                                                                                         | <b>Noise levels (BW/CL)</b>                    | <b>Sound Power Level (LWA.m)</b><br>Active (1-sided) : 6.0B*1, 0.3B*1<br><b>Sound Pressure Level (LpAm)</b><br>Bystander's position:<br>Active (1-sided) : 46 dB*1<br>*1 Reference value: measured only one unit with ISO7779, described with ISO9296:2017                                                                                                                                                                                                                                                                                                                            |
| <b>Maximum Number of Connection Lines</b> | 1                                                                                                                                                                                                                                                                                       | <b>Standards</b>                               | Blue Angel (Applied for)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Modem Speed</b>                        | Super G3: 33.6 kbps<br>G3: 14.4 kbps                                                                                                                                                                                                                                                    | <b>CONSUMABLES</b>                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Compression Method</b>                 | MH, MR, MMR, JBIG                                                                                                                                                                                                                                                                       | <b>Toner Cartridge</b>                         | C-EXV 65 Toner BK/C/M/Y                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Resolution (dpi)</b>                   | 400 x 400 (Ultrafine), 200 x 400 (Superfine), 200 x 200 (Fine), 200 x 100 (Normal)                                                                                                                                                                                                      | <b>Toner Yield</b>                             | (Estimated Yield @ 5% Coverage)<br>C-EXV 65 Toner BK: 17,500 pages<br>C-EXV 65 Toner C/M/Y: 11,000 pages                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Sending/Receiving Size</b>             | Sending: A3, A4, A4R, A5*1, A5R*1, B4, B5*2, B5R*1<br>Receiving: A3, A4, A4R, A5R, B4, B5, B5R<br>*1 Sent as A4<br>*2 Sent as B4 short                                                                                                                                                  |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>FAX memory</b>                         | Up to 30,000 pages                                                                                                                                                                                                                                                                      |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Speed dials</b>                        | Max. 200                                                                                                                                                                                                                                                                                |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Group dials/destinations</b>           | Max. 199 dials                                                                                                                                                                                                                                                                          |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Sequential broadcast</b>               | Max. 256 addresses                                                                                                                                                                                                                                                                      |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Memory backup</b>                      | Yes                                                                                                                                                                                                                                                                                     |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Fax Features</b>                       | Sender's Name (TTI), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox                                                                                                 |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>STORE SPECIFICATIONS</b>               |                                                                                                                                                                                                                                                                                         |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Memory Media</b>                       | Standard: USB Memory                                                                                                                                                                                                                                                                    |                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

# TECHNICAL SPECIFICATIONS

# imageRUNNER C3326i

## SOFTWARE AND PRINTER MANAGEMENT

Tracking and reporting  
Remote management tools

uniFLOW Online Express  
iW Management Console  
eMaintenance  
Content Delivery System  
ScanGear

Scanning software

## PAPER SUPPLY OPTIONS

Cassette Feeding

Cassette Feeding Unit-AW1:  
  
Paper Capacity: 550 sheets x 2 (1,100 sheets) (80 gsm)  
Paper Type: Thin, Plain, Recycled, Colour, Heavy, Bond, Transparency, Pre-punched, Letterhead  
Paper Size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R,  
Custom Size: 105.0 x 148.0 mm to 304.8 x 457.2 mm  
Paper Weight: 52 to 256 gsm  
Power Source: From the Main Unit  
Dimensions (W x D x H): 565 x 635 x 248 mm  
Weight: Approx. 16.0 kg

## OUTPUT OPTIONS

Inner Tray

Inner 2way Tray-M1:  
  
Tray Capacity (80 gsm paper)  
Upper tray: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R: 100 sheets  
Lower tray (standard tray): A4, A5, A5R, A6R, B5, B5R: up to 250 sheets  
SRA3, A3, A4R, B4: up to 100 sheets  
Paper Weight: 52 to 300 gsm  
Dimensions (W x D x H): 428 x 405 x 88 mm  
Weight: Approx. 0.7 kg

Copy Tray

Copy Tray-T2:  
  
Capacity (with 80gsm paper):  
A4, A5R, B5, B5R: 100 sheets  
A3, A4R, B4: 75 sheets  
Dimensions (W x D x H): 442 x 373 x 176 mm (attached to the main unit, when the extension tray is extended) Weight: Approx. 0.5kg

## Inner Finisher

Inner Finisher-L1:

Tray Capacity (with 80gsm paper):  
Upper Tray: A4, A5, A5R, B5: approx. 50 sheets  
SRA3, A3, A4R, A6R, B4, B5R: approx. 50 sheets  
Lower Tray: A4, A5, A5R, B5: approx. 500 sheets  
SRA3, A3, A4R, B4, B5R: 250 sheets  
A6R: 30 sheets  
Envelope: 10 sheets  
Paper Weight: 52 to 300 gsm  
Staple Position: Corner, Double  
Staple Capacity:  
A4, B5: 50 sheets (52 to 90 gsm)  
A4R : 40 sheets (52 to 90 gsm)  
A3, B4: 30 sheets (52 to 90 gsm)  
Eco Staple:  
A3, A4, B4, B5: 10 sheets (52 to 64 gsm)  
8 sheets (65 to 81.4 gsm)  
6 sheets (82 to 105 gsm)  
Staple On Demand: approx. 40 sheets (80 gsm)  
Dimensions (W x D x H): 575 x 525 x 225 mm (when the extension tray is extended)  
Weight: Approx. 9.1 kg

## Inner 2/4 Hole Puncher

Inner 2/4 Hole Puncher-D1 (Requires Inner Finisher-L1):  
Two or Four Holes  
Acceptable Punch Paper Weight: 52 to 300 gsm  
Acceptable Punch Paper Size:  
Two holes: A3, A4, A4R, A5, B4, B5, B5R,  
Four holes: A3, A4

## Inner 4 Hole Puncher

Inner 4 Hole Puncher-D1 (Requires Inner Finisher-L1):  
Four Holes  
Acceptable Punch Paper Weight: 52 to 300 gsm  
Acceptable Punch Paper Size: A3, A4, A4R, A5, B4, B5, B5R

## HARDWARE ACCESSORIES

Card Readers  
Others

IC Card Reader Attachment-B4  
Platen Cover-Y3

## SYSTEM AND CONTROLLER OPTIONS

Print Accessories

PCL International Font Set-A1  
PS Printer Kit-CS1

Data Storage

Optional Data Storage Kit-A1

Send Options

Universal Send Trace & Smooth PDF Kit-A1  
Universal Send Digital User Signature Kit-C1

Barcode Printing

Barcode Printing Kit-D1

System Accessories

Copy Control Interface Kit-D1

Fax Accessories

Super G3 FAX Board-BN1  
Remote Fax Kit-A1

## OTHER OPTIONS

Accessibility Accessories

ADF Access Handle-A1  
Media Adjustment kit-A1

Staple Cartridges

Staple-P1

## Software & Solutions



## Compatibility



Canon Inc.  
canon.com  
Canon Europe  
canon-europe.com  
English edition  
© Canon Europa N.V., 2023